



Worcester Air Filter Regulator

Product Specification

FCD WCAPS1053-00 – 9/05

Introduction

Flowserve Worcester filter regulators remove liquid and solid contaminants to prolong service life of actuators, solenoid valves, positioners, I/P pressure transducers, and other pneumatic controls. The use of clean, dry plant air reduces the costly repairs associated with water and particulate contaminants present in supply air. The removal of contaminants is essential to the service life of sensitive electro-pneumatic devices such as I/P pressure transducers. The Worcester filter regulator combines the functions of a filter and pressure regulator into one compact, rugged design.

Applications

Install Worcester filter regulators directly on our pneumatic controls and devices whenever supply air is susceptible of containing liquids, particulate contaminants, or pressure surges. The Worcester filter regulator removes any water that has condensed as a result of unexpected low temperature or high dewpoint.

Features

1. External surfaces are protected with a baked-on, satin black epoxy paint over chromate conversion coated aluminum, providing excellent corrosion and chip resistance.
2. Metal bowl with liquid level indicator utilizes a highly visible prismatic lens that allows liquid level monitoring up to 30 feet away.
3. Manual drain provides cost-effective serviceability.
4. The quick release bayonet type bowl can be removed and installed with a quick 1/8 turn. An interlock prevents removal of the bowl while pressurized.
5. The 5-micron filter is replaceable and has an extra large surface area for extended service life.
6. The balanced valve design provides superior regulation by reducing the effect of variations in inlet pressure on the outlet pressure.
7. The filter regulator has a relieving diaphragm with an integral locking pressure adjustment knob.





Specifications

Fluid	Compressed Air
Inlet Pressure (Max)	250 psi (17.2 bar)
Temperature (Max)	175°F (79°C)
Filter Element	5 micron

Materials of Construction

Body/Bowl	Aluminum (chromate conversion coated / black epoxy paint)
Seals	Neoprene and Nitrile
Filter Element	Porous Polypropylene


How to Order

Specify Worcester Controls filter regulator with or without gauge.

¼" NPT – Worcester Controls p/n 109625

½" NPT – Worcester Controls p/n 109626

¾" NPT – Worcester Controls p/n 109627

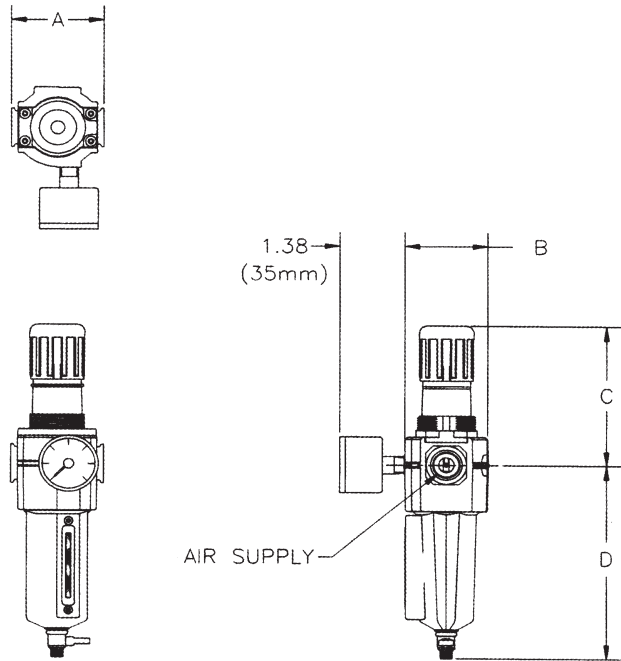

Dimensions

NPT	P/N	A	B	C	D
¼	109625	1.98	1.91	2.89	5.27
		50 mm	48 mm	73 mm	134 mm
½	109626	3.15	2.86	4.88	7.00
		80 mm	73 mm	124 mm	178 mm
¾	109627	3.15	2.86	4.88	7.00
		80 mm	73 mm	124 mm	178 mm

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© 2005 Flowserve Corporation, Irving, Texas, USA. Flowserve is a registered trademark of Flowserve Corporation.

To find your local Flowserve representative:

For more information about Flowserve Corporation, visit www.flowserve.com or call USA 1 800 225 6989

FCD WCAPS1053-00 Printed in USA.

United States
 Flowserve Corp.
 Flow Control
 Worcester Actuation Systems
 1978 Foreman Drive
 Cookeville, TN 38501
 Phone: 931-432-4021
 Fax: 931-432-5518