


## Durco® Mark 3™ Sealmatic Pump

*The Mark 3 Sealmatic pump provides reliable performance in many services where traditional mechanical seals are not suitable.*

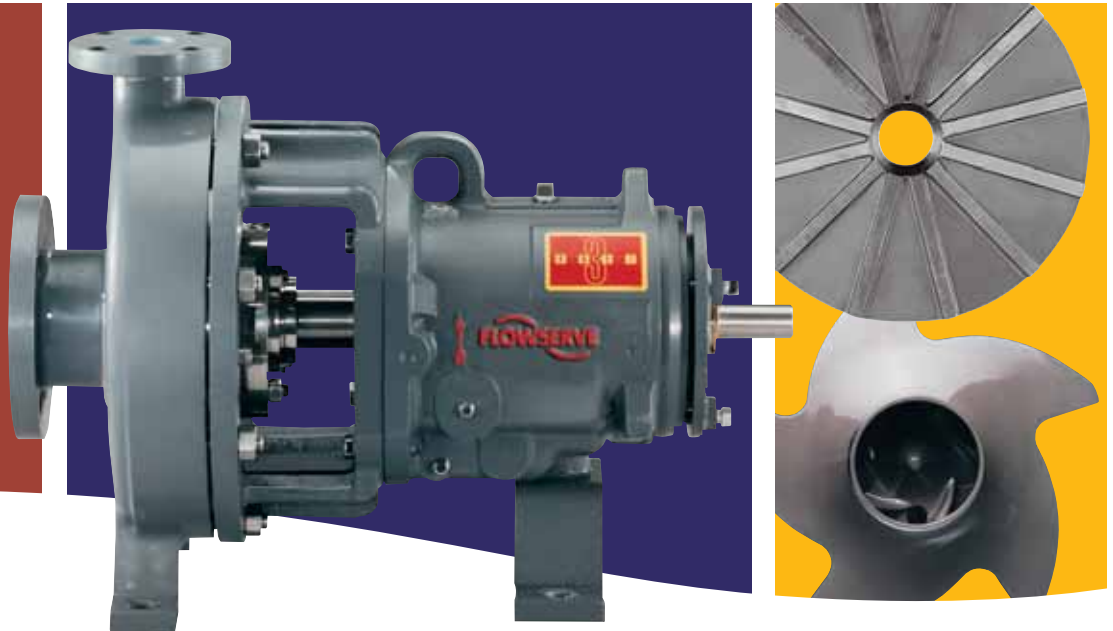

### ***Dynamic Sealing Ideal for Tough-To-Seal Applications***

*With the Flowserve Mark 3 Sealmatic pump, no mechanical seal is needed during operation. A dynamically sealing expeller repels fluid from the seal chamber, making it ideal for hard-to-seal applications. Furthermore, the need for external flushing and process contamination control are eliminated.*

The Flowserve Mark 3 family of ANSI process pumps came to prominence in the chemical processing industries under the Durco heritage name. The Mark 3 Sealmatic pump represents one of many pioneering innovations from Flowserve and Durco and is suitable for many critical process applications.

### ***Applications***


- Tough services where sealing is difficult
- Services where a seal flush is undesirable (e.g., evaporator feed)
- Continuous, around-the-clock applications
- Batch operations where a "run dry" condition might exist

### ***Operating Parameters***

- Flows to 1680 m<sup>3</sup>/h (7400 gpm)
- Heads to 230 m (755 ft)
- Pressures to 31 bar (450 psi)
- Temperatures from -29°C (-20°F) to 149°C (300°F)

## *World Renowned for Reliability and Performance*

The Flowserve Mark 3 Sealmatic pump conforms to ANSI B73.1 and incorporates advanced design features, many of which are based on the industry-leading Mark 3 ANSI Standard pump design.

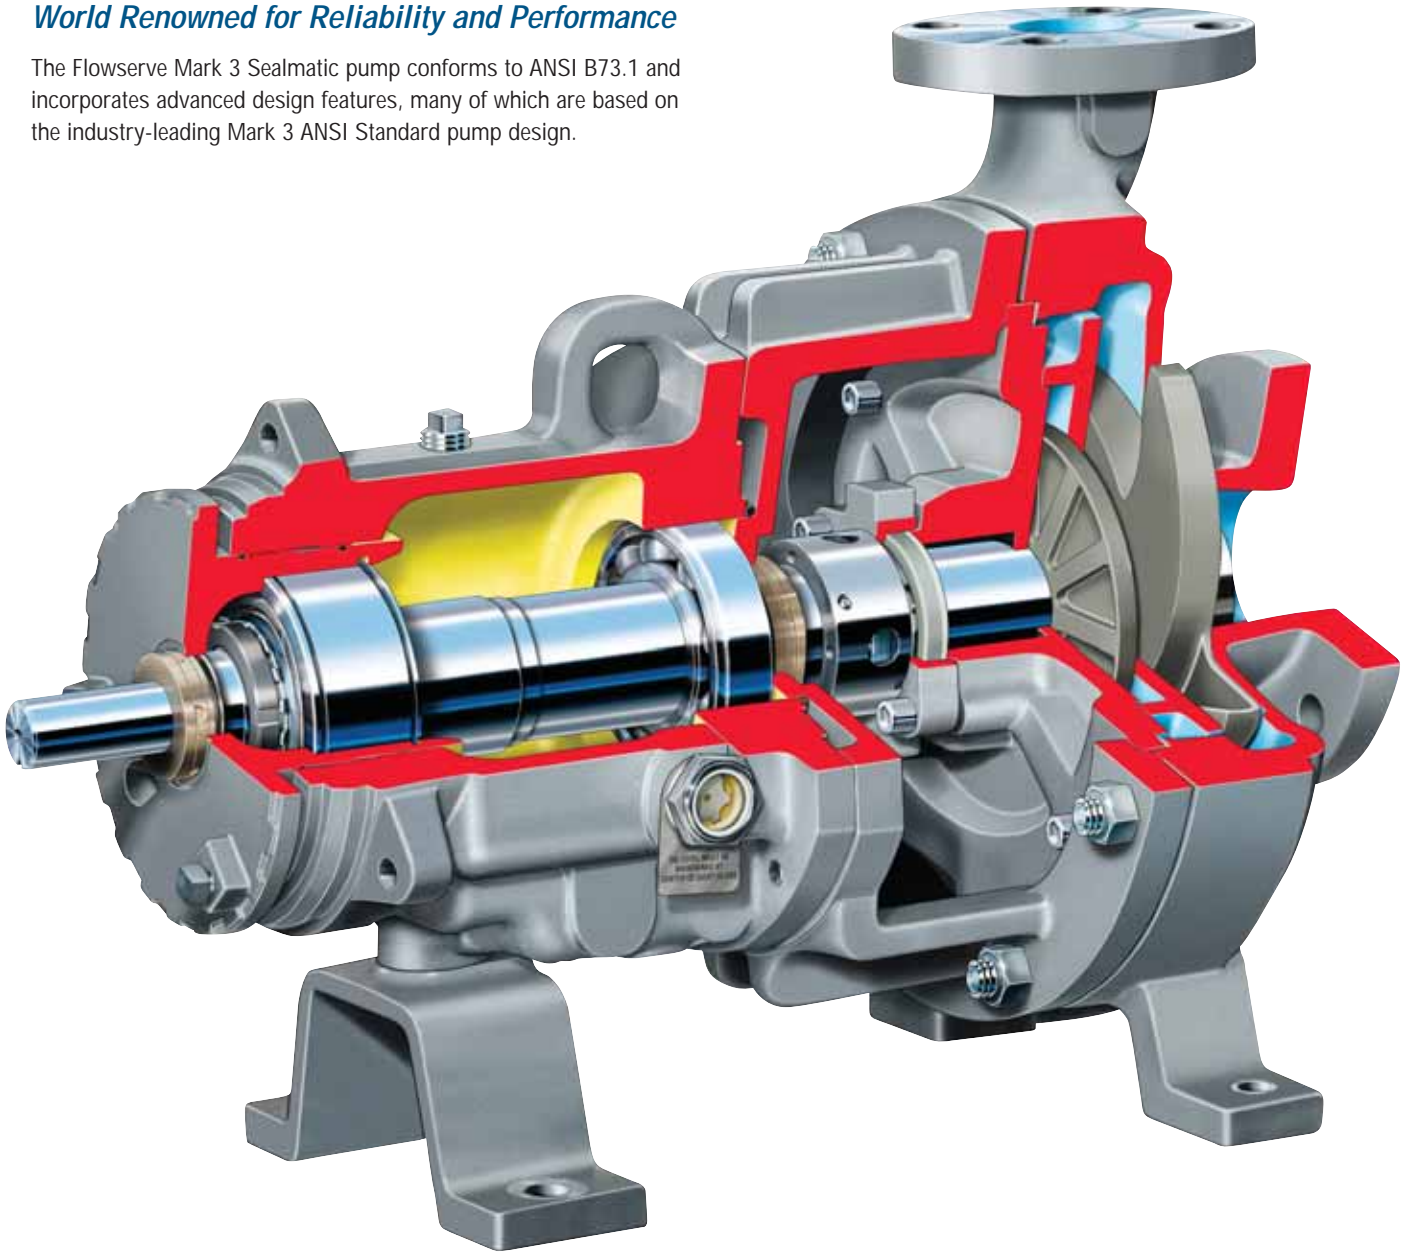

***Metal-to-Metal Construction*** assures a true running and concentric shaft, extending bearing and mechanical seal life

***Large Shaft and Bearing Components*** extend bearing life and reduce shaft deflection and vibration

***ANSI 3A™ Power End with Inpro VBXX® bearing isolators*** keeps lubricants in and contaminants out for long bearing life; available with a lifetime warranty


***External Micrometer Impeller Adjustment*** accurately sets impeller clearance in 20 seconds, in the shop or the field

***Standard Reverse Vane Impeller*** offers repeatable pump performance throughout the life of the pump

***Spinning Expeller*** creates centrifugal force to expel fluid from the seal chamber

© VBXX is a registered trademark of Inpro/Seal Company.


# Durco Mark 3 Sealmatic Pump

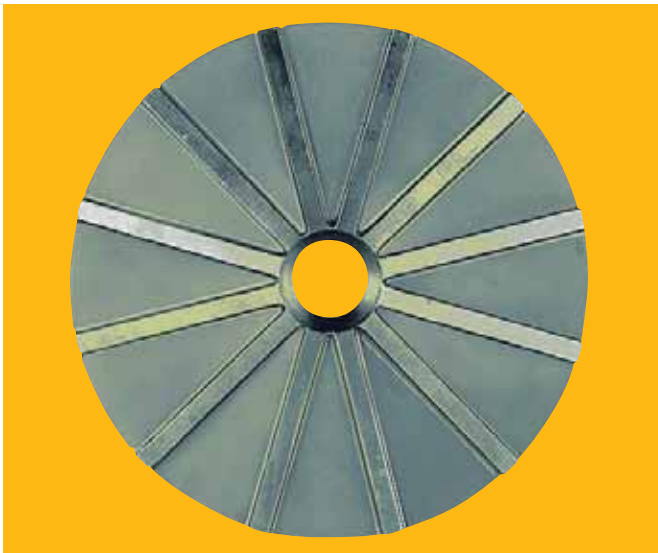

## Choice of Static Sealing Options

Flowserve provides a choice of static sealing options to keep the pump from leaking while the pump is stopped. They include:

- Flexible graphite packing
- Dry-running end-face seal
- Stationary fluoropolymer disk seal – FXP
- Elastomeric lip seals

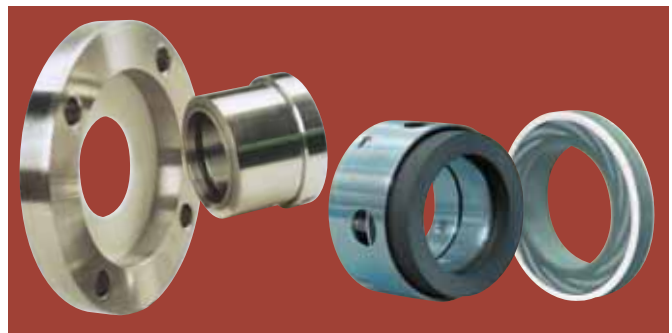

## Seventeen Sizes Available

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• <b>Eleven Group 2</b></li> <li>2K2x1M-10A</li> <li>2K3x1.5M-10A</li> <li>2K3x2M-10A</li> <li>2K4x3M-10</li> <li>2K4x3M-10H</li> <li>2K6x4M-10</li> <li>2K6x4M-10H</li> <li>2K3x1.5M-13</li> <li>2K3x2M-13</li> <li>2K4x3M-13</li> <li>2K6x4M-13A</li> </ul> | <ul style="list-style-type: none"> <li>• <b>Six Group 3</b></li> <li>3K8x6M-14A</li> <li>3K10x8M-14</li> <li>3K6x4M-16</li> <li>3K8x6M-16A</li> <li>3K10x8M-16</li> <li>3K10x8M-16H</li> </ul> |
|--|--|


Offered in a wide range of metallurgy to meet application needs.

## Additional Configurations

The Sealmatic design also is available in recessed impeller and in-line configurations.

## Dynamic Sealing Technology


The Mark 3 Sealmatic Pump incorporates a dynamic sealing expeller to evacuate liquid from the seal chamber via centrifugal force. This design provides reusable performance in many services where traditional mechanical seals are not suitable.

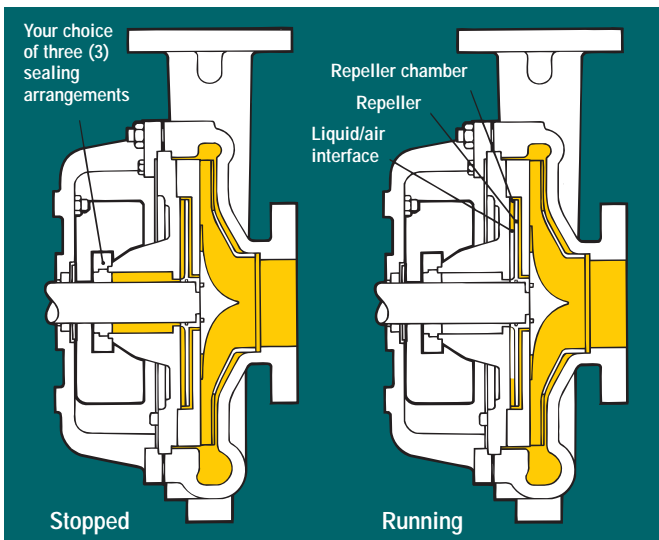

## Benefits of Sealmatic Dynamic Sealing Technology

- Eliminates the need for conventional mechanical seals
- Eliminates need for external flush and associated product dilution
- Eliminates need for contamination control

## Mark 3 Sealmatic Performance Curve

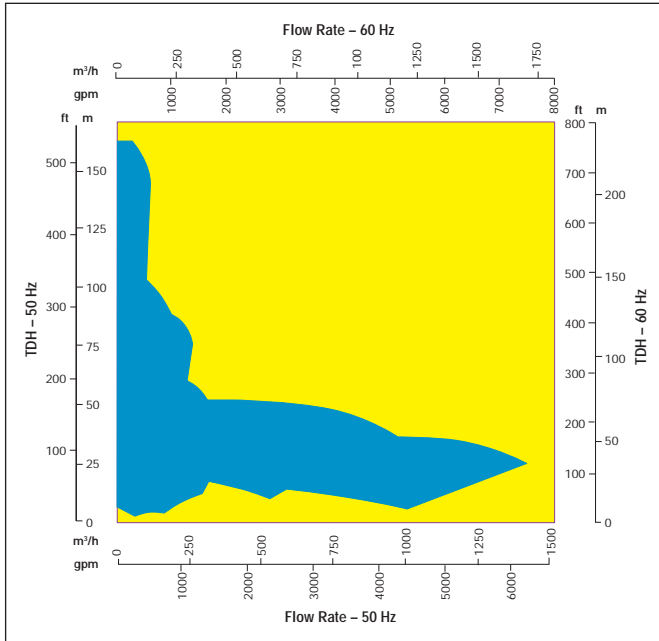

## The KW941 Pump Power Monitor

The KW941 Pump Power Monitor monitors and displays actual power to the pump, offering simultaneous protection from underload and overload operating conditions. The KW941 helps to eliminate costly downtime and expensive pump repairs caused by:

- Dry running
- Pump overloads
- Cavitation
- Blocked lines
- Closed suction or discharge valves
- Excessive wear or rubbing



Bulletin PSS-10-13.9 (E/A4) Printed in USA. July 2007.

© Flowserve Corporation

### To find your local Flowserve representative:

For more information about Flowserve Corporation, visit [www.flowserve.com](http://www.flowserve.com) or call USA 1 800 728 PUMP (7867)

### USA and Canada

Flowserve Corporation  
5215 North O'Connor Blvd.  
Suite 2300  
Irving, Texas 75039-5421 USA  
Telephone: 1 937 890 5839

### Europe, Middle East, Africa

Flowserve Corporation  
Via Rossini 90/92  
20033 Desio (Milan), Italy  
Telephone: 39 0362 6121  
Telefax: 39 0362 303396

### Latin America

Flowserve Corporation  
Boulevard del Cafetal  
Edificio Ninina, Local 7  
El Cafetal - Caracas  
Venezuela 1061  
Telephone: 58 212 985 3092  
Telefax: 58 212 985 1007

### Asia Pacific

Flowserve Pte. Ltd.  
200 Pandan Loop #06-03/04  
Pantech 21  
Singapore 128388  
Telephone: 65 6775 3003  
Telefax: 65 6779 4607