

1 Universal Design

Adaptable to any manufacturer's existing ISO 13709/API 610 OH2 pumps and other overhung configurations

2 Heavy-Duty Rotor

Compliant to ISO 13709/API 610; increases shaft stiffness for improved MTBR and longer seal life

3 ISO 21049/API 682 Seal Chamber

Accommodates a variety of single and dual cartridge seals to minimize VOC emissions

4 Closed Lubrication System

Prevents ingress of contaminants and moisture for longer bearing life

5 Cooling Fan


Extends bearing life; eliminates need for expensive cooling water

6 Air Gap

Insulates bearing housing from heat migration in hot services for longer bearing life

7 Optimized Hydraulics (optional)

Saves energy through increased efficiency

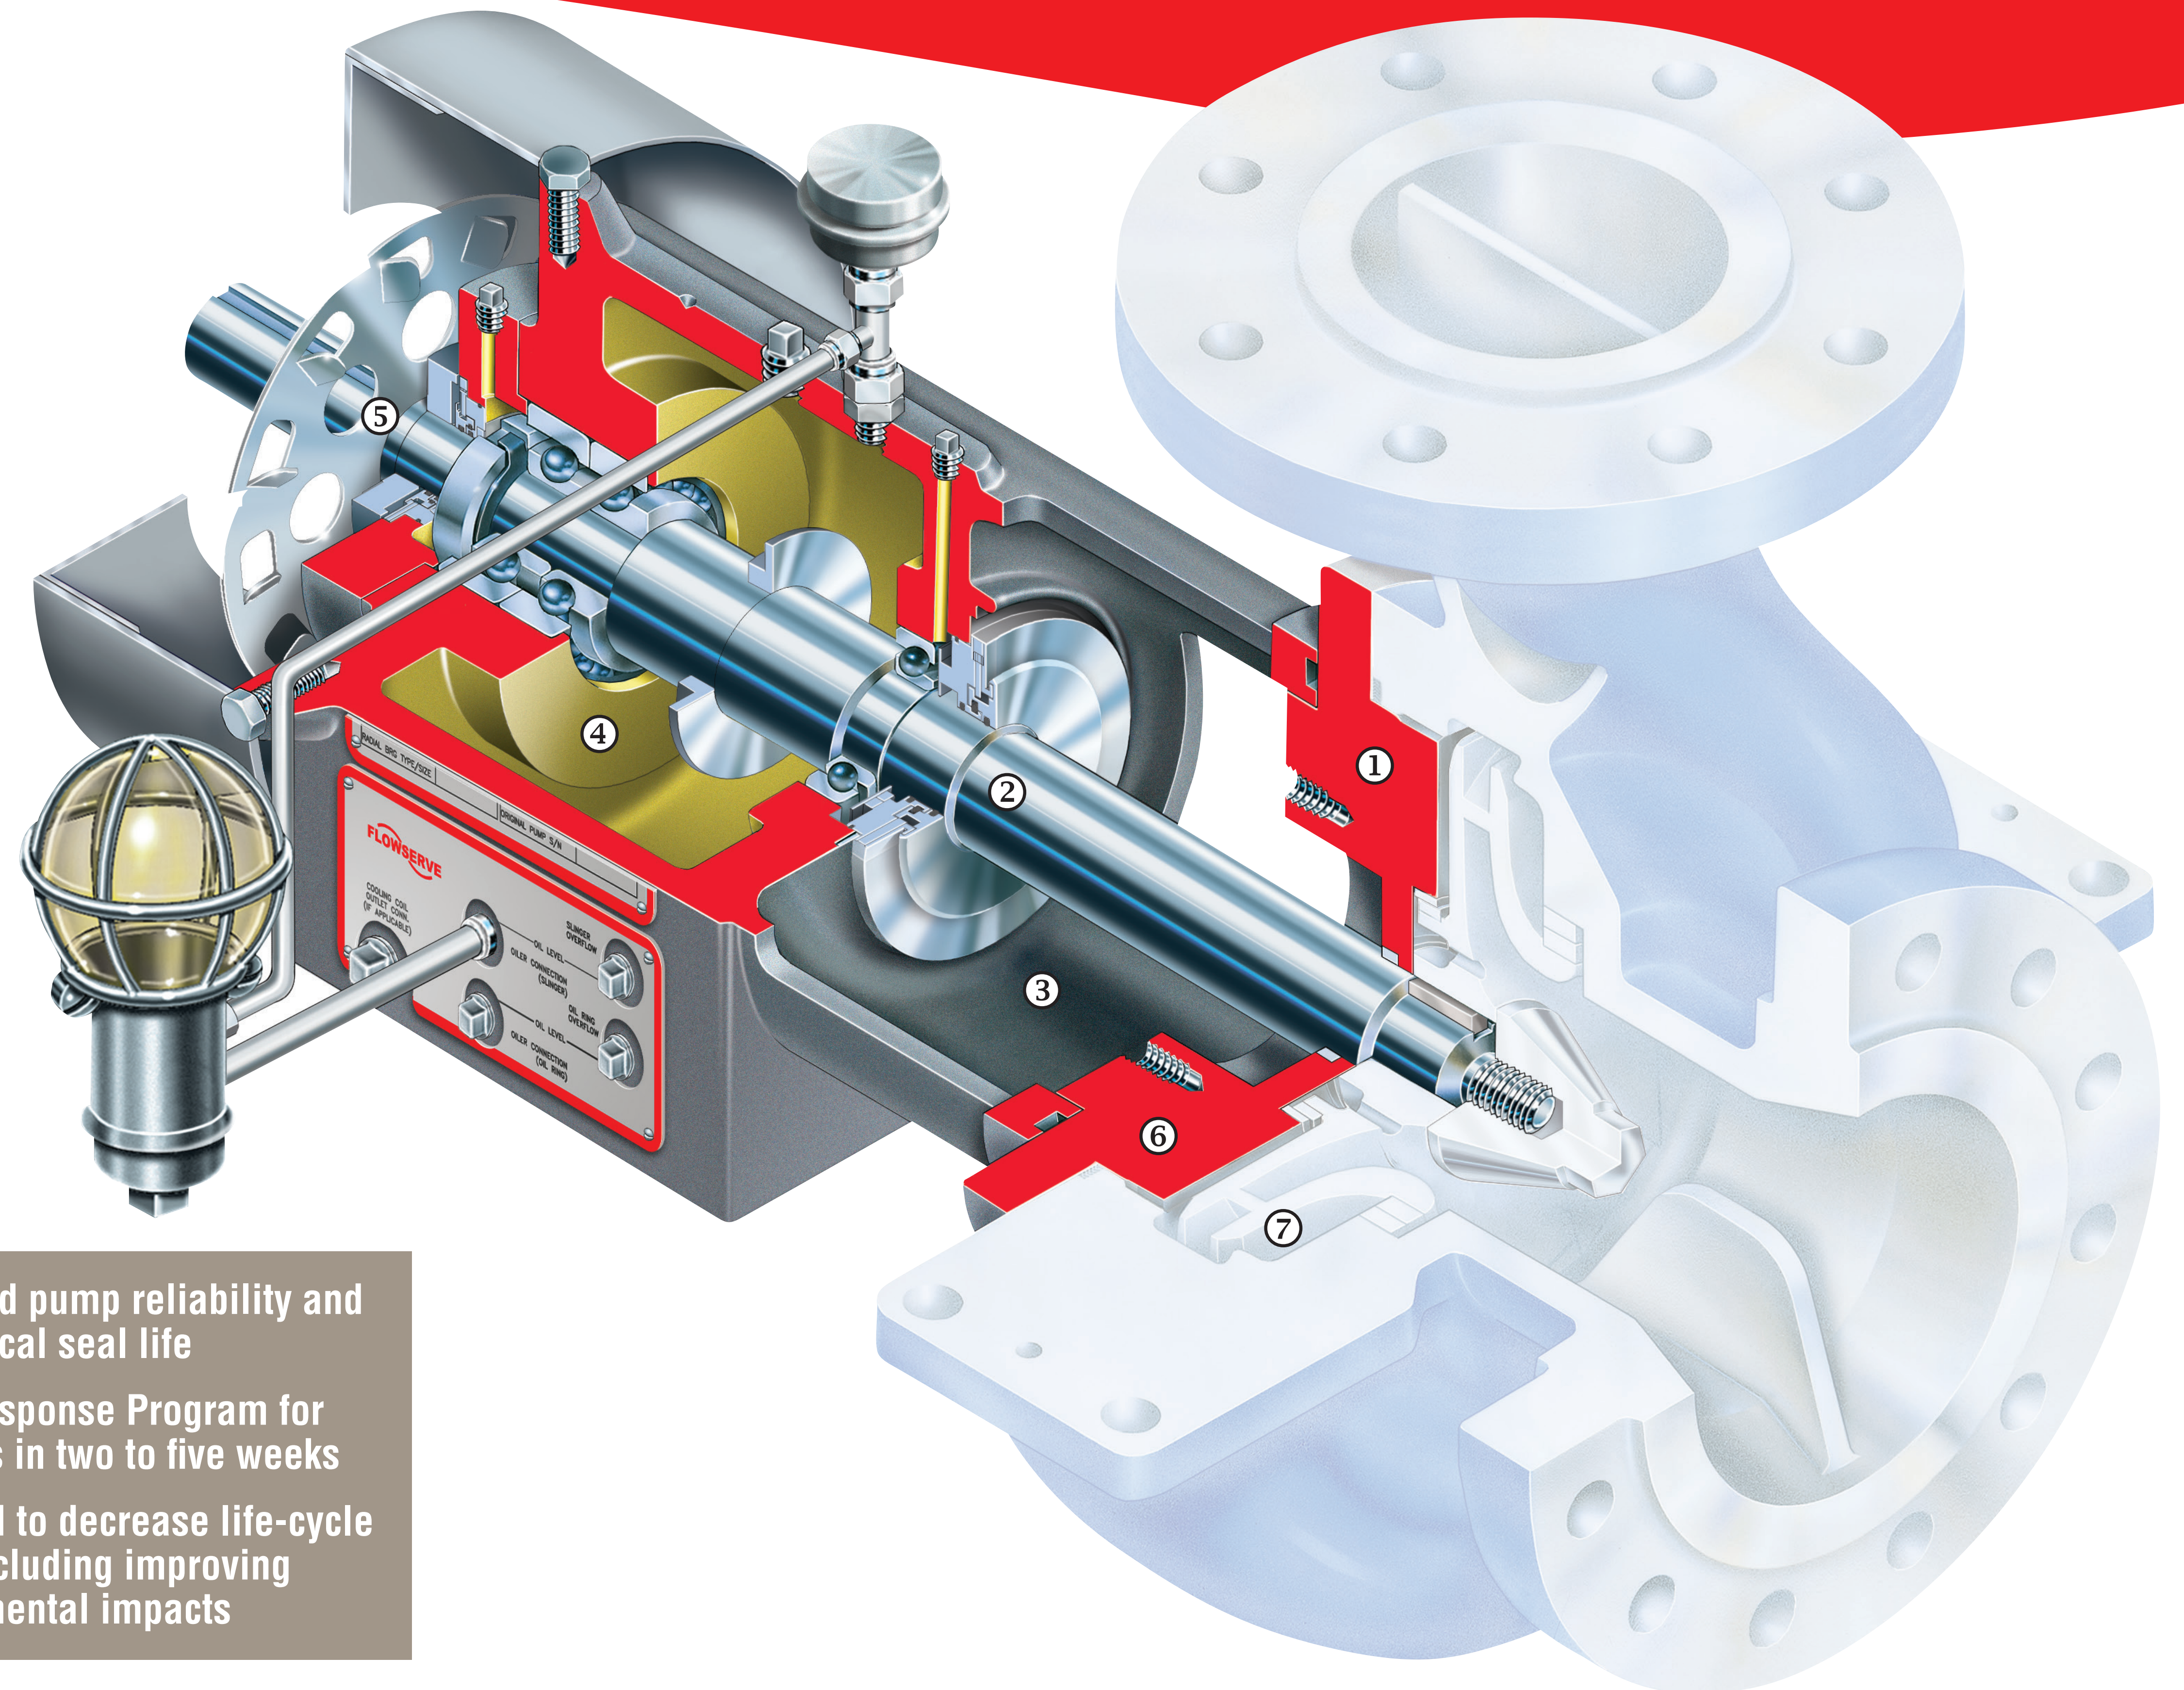

- Increased pump reliability and mechanical seal life
- Quick Response Program for upgrades in two to five weeks
- Designed to decrease life-cycle costs, including improving environmental impacts