



# Logix™ 3800 Digital Positioner

Maximize production and reduce operating costs



*Experience In Motion*

## Solving the toughest challenges in flow management



Flowserve is working with the world's most important providers of oil and gas, power, chemicals, water and other essential products to optimize performance and maximize production. Our portfolio of pumps, seals, valves and actuation is only part of the story. Our customers need answers that demand extensive know-how and experience, and we've got it. More than 18,000 committed associates are expert resources for engineering, project management, technical support and service in every corner of the world.



*The Logix 3800 positioner features powerful diagnostics that identify field problems and expedite corrective actions to ensure reduced return-to-operation times.*

## You can have it all: simple configuration and calibration, powerful diagnostics and reliable performance

The Flowserve Logix 3800 digital positioner helps plant owners and operators maximize production while minimizing operating costs. It's the oil and gas and chemical industries' choice for applications that require a balance between technological sophistication and long-lasting reliability in tough environments.

This high-precision positioner simplifies installation through easy configuration and calibration. It also facilitates improvements in process uptime, reliability and process throughput. Advanced diagnostics not only identify

developing problems in the control valve, but also help guide corrective actions to ensure reduced return-to-operation times.

Compatible with linear and rotary valves and actuators, the Logix 3800 digital positioner offers embedded measurement, data reduction, and diagnostic functionalities. Its control system-independent user interface facilitates easy configuration, operation and system diagnostics with a single view.

# Exceeding industry standards, not budgets

## Robust and reliable

Rugged, certified SIL 3 capable modular design delivers maximum reliability in the toughest environments. A shielded non-contact position sensor and dual-poppet pneumatic relay ensure trouble-free performance in demanding applications. In addition to simplifying maintenance, the modular enclosure provides protection from impact, vibration, and dirt and water ingress (IP-66).

## Easy configuration and calibration

Installation and operation are made easy by the innovative quick calibration feature to simplify commissioning. A quick calibration button automatically configures the zero, span and gain of the positioner for most valves in less than 60 seconds.

## Application versatility

Broad application versatility with standard communication technologies, including analog position control, HART or Foundation Fieldbus. Discrete or 4-20mA I/O can be used for signaling external to the device. Optional modules are available to remotely locate the positioner from the control valve.

## Increased safety

Intrinsically safe, non-incendive and explosion-proof design ensures safe, reliable operation in hazardous conditions for increased plant and personnel safety. The certifications are valid from -55°C to 85°C (-67°F to 185°F). The Logix 3800 digital positioner is certified for use in explosion-proof Ex d IIC hazardous locations.

## Greater air capacity

The Logix 3800 digital positioner is equipped with double-poppet technology, which allows it to have up to 80% more air capacity than previous designs with minimal air consumption.

## Broad compatibility

Compatible with a variety of valve and actuation configurations including: rotary or linear valves; double- or single-acting; air-to-open or air-to-close; very large to very small actuators; split range; custom characterization; precision linearization; analog and discrete I/O; and more.



## Predictive diagnostics

With five pressure sensors, the Logix 3800 digital positioner enables operators to identify and assess the severity of developing problems in valves and actuators so action can be taken before a critical event.

**Supply pressure warning** — Monitors the instrument air supply pressure

**Friction high/low warnings** — Monitors the adjustment of the packing and seals

**Pneumatic leak warning** — Monitors excessive air consumption indicating leaks in actuator or tubing


**Fail-safe position error** — Detects problems with the fail-safe actuator spring

**Backlash warning** — Monitors the linkage of the actuator to the valve and detects loose connections



# Reliably versatile by design

The Logix 3800 digital positioner features a modular design that allows for flexible mounting configurations. Position control is possible for both double-acting or single-acting valves with minimal air consumption. Its broad application versatility is made possible by a flexible design that features pneumatic ports on either side and allows direct mounting to VDI/DE standards without the need for external tubing.

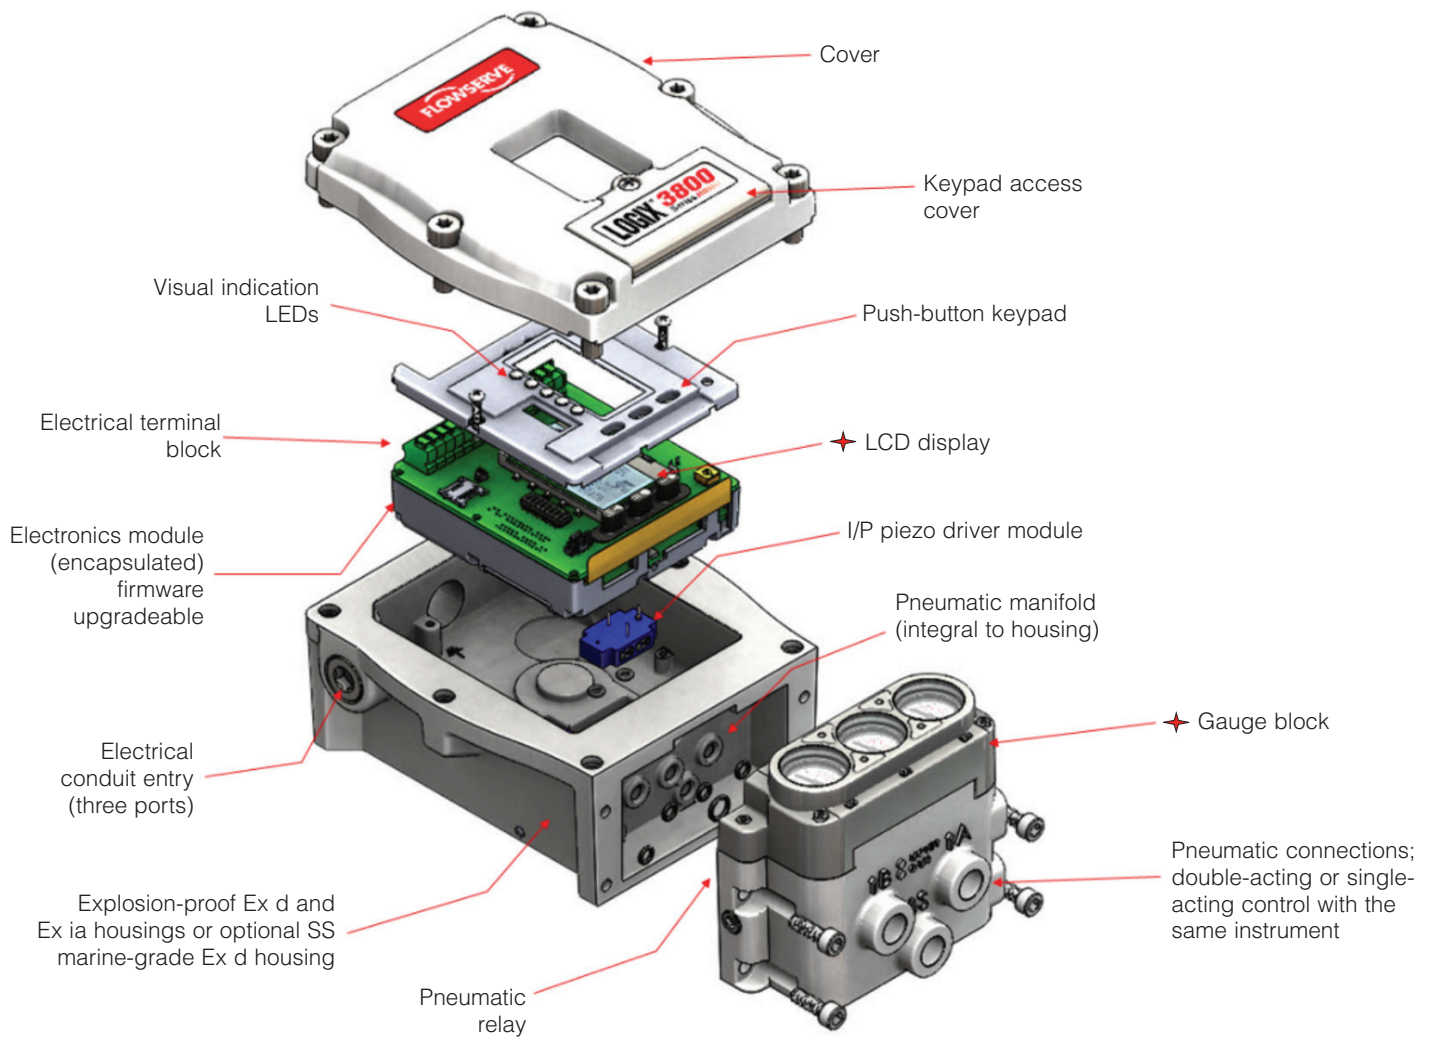

Options

# Engineered for powerful diagnostics

The Logix 3800 digital positioner features some of the industry's most advanced diagnostic capabilities. With basic to advanced valve diagnostic signatures and offline/online diagnostic functions, the Logix 3800 can perform diagnostics to monitor the health status of a wide range of valve and actuator assemblies.



- Industrial-grade electronic components
- 32-bit microprocessor
- System on chip technology
- State-of-the-art electronics
- Fast “recovery time”: 500 milliseconds from cold start
- Low compliance voltage (10 VDC @ 20 mA)
- Low compliance current (3.6 mA)
- Effective resistance: 500  $\Omega$  @ 20 mA
- Fully encapsulated
- All electronics and sensors onboard
- The cover buttons allow access to menus in hazardous locations
- Spring-loaded terminals
- Scalable application options (auxiliary I/Os)
- Firmware upgradeable through communication protocols Hart or Foundation Fieldbus
- Valve diagnostic signatures stored in NVRAM
- Advanced functionality without LCD using keypad



## Specifications and certifications

| Performance characteristics* | Description                  |
|------------------------------|------------------------------|
| Resolution                   | ≤0.25%                       |
| Linearity                    | ±0.80%                       |
| Repeatability                | ≤0.05%                       |
| Hysteresis                   | ≤1.00%                       |
| Deadband                     | ≤0.10%                       |
| Sensitivity                  | ≤0.25%                       |
| Stability                    | ≤0.40%                       |
| Long-term drift              | ≤0.50%                       |
| Supply pressure effect       | ≤0.20% per 10 psi (0.69 bar) |

\*Parameters characterized on a 25 in<sup>2</sup> linear actuator.

### Safety certifications

- ATEX, IECEx and FM/CSA explosion-proof, intrinsically safe and non-incendive
- SIL 3 capable on HART version only

### Communications certifications

- HART
- Foundation Fieldbus

| Output air capacity |                                      |
|---------------------|--------------------------------------|
| Standard relay      | 18 SCFM 60 psi (C <sub>v</sub> 0.47) |
| Low bleed relay     | 18 SCFM 60 psi (C <sub>v</sub> 0.47) |

| Air consumption |  |
|-----------------|--|
| Standard relay  | 0.3 SCFM 60 psi (C <sub>v</sub> 0.008)   |
| Low bleed relay | 0.075 SCFM 60 psi (C <sub>v</sub> 0.002) |

| Temperature range |                                |
|-------------------|--------------------------------|
| Operating         | -55°C to 85°C (-67°F to 185°F) |





# Logix 3800 positioner configurations

| Selection   | Description   | Code |
|---|---|------|
| <b>Base Model</b>   | Logix 3800 Series   | 38   |
| <b>Communications</b>   | HART  | 2    |
|   | Foundation Fieldbus   | 4    |
| <b>Housing</b>  | Aluminum—Intrinsically Safe (IS)  | 0    |
|   | Aluminum—Explosion proof (Ex d)   | 1    |
|   | Stainless steel—Explosion proof (Ex d)  | 2    |
| <b>Certifications</b>   | General purpose   | 14   |
|   | InMetro, Ex db, Ex ia, ib, ic, Ex t, Ex nA, IP66  | 06   |
|   | ATEX / IECEx, Ex db, Ex ia, ib, ic, Ex t, Ex nA, IP66 <sup>5</sup>  | 28   |
|   | FM/US/Canada Ex Proof Class I Div 1 Gp B-D (A)Ex db, Dust Ignition Proof Class II, III Gp E-G (A)Ex tb, Intrinsically Safe Class I, II, III Div 1 Gp A-G (A)Ex ia,ib ic, Nonincendive Class I, II, III, Div 2 Gp A-G (A) Ex nA, Type 4x, IP66 <sup>5</sup>  | 34   |
|   | IS Housing Option Only — ATEX / IECEx , Ex ia,ib,ic, Ex t, Ex nA, IP66 <sup>5,8</sup> FM/US/Canada, Intrinsically Safe Class I, II, III Div 1 Gp A-G (A)Ex ia,ib ic, Nonincendive Class I, II, III, Div 2 Gp A-G (A) Ex nA, Dust Ignition Proof Class II, III Gp E-G (A)Ex tb, Type 4x, IP66 <sup>5</sup> | 37   |
|   | ATEX / IECEx ,Ex db, Ex tb,FM/US/Canada Ex Proof Class I Div 1 Gp B-D (A)Ex db, Dust Ignition Proof Class II, III Gp E-G (A)Ex tb, Type 4x, IP66 <sup>5</sup>   | 43   |
|   | EAC TR CU Ex db, Ex ia, ib, ic, Ex t, Ex nA, IP66 <sup>5</sup>  | 44   |
|   | US Explosion Proof, Class I, Div 1, Gp A, B, C, D, Class II, Gp E, F, G, Class III CANADA Explosion Proof Class I, Div 1, Gp B, C, D, Class II, Gp E, F, G, Class III <sup>8</sup>  | 45   |
| <b>Threaded Connections</b>                                   | Mounting: 3/8 in 18 UNC, Pneumatics: 1/4 in NPTF, Conduit: 1/2 in NPTF; Vents 1/4 in NPTF   | E    |
|   | Mounting: M8 x 1.25; Pneumatics: 1/4 in NPTF; Conduit: M20 x 1.5; Vents 1/4 in NPTF   | M    |
|   | Mounting: M8 x 1.25; Pneumatics: G 1/4 in; Conduit: M20 x 1.5; Vents G 1/4 in   | G    |
| <b>Actuation Medium</b>                                       | Air   | A    |
|   | Natural gas   | G    |
| <b>Relay Type</b>   | Double-acting, standard <sup>6,7</sup>  | D    |
|   | Double-acting, low bleed (natural gas) <sup>7</sup>   | L    |
| <b>Action</b>   | Standard, double-acting (four-way)  | 4    |
|   | Standard, single-acting (three-way)   | 3    |
| <b>Pressure Gauges</b>  | No gauges   | 0    |
|   | Nickel plated with brass internals, psi (bar/kPa)   | 1    |
|   | Nickel plated with brass internals, psi (kg/cm <sup>2</sup> )   | 2    |
|   | Stainless steel with brass internals, psi (bar/kPa)   | 3    |
|   | Stainless steel with brass internals, psi (kg/cm <sup>2</sup> )   | 4    |
|   | UCC press test plug, 1/8 in NPT   | A    |
| <b>Pneumatic Output Orientation</b>                           | Valve, tank, Schrader 645A  | B    |
|   | Pneumatic ports, vents and gauges oriented for display on the right side of the positioner  | R    |
| <b>Diagnostics</b>  | Pneumatic ports, vents and gauges oriented for display on the left side of the positioner   | L    |
|   | Standard diagnostics (standard functionality) <sup>2</sup>  | 0    |
| <b>Display</b>  | Pro diagnostics (full functionality)  | 1    |
|   | No LCD <sup>4</sup>   | 0    |
| <b>Feedback Shaft</b>   | LCD   | 1    |
|   | No feedback shaft   | 0    |
|   | D—316 stainless steel shaft (Valtek® standard)  | 1    |
|   | NAMUR—316 stainless steel shaft (VDI/VDE 3845)  | 2    |
|   | DD—316 stainless steel shaft (Logix 3200/3400 retrofit mounting)  | 3    |
|   | NAF—316 stainless steel shaft   | 4    |
|   | DD—316 stainless steel shaft (Valtek standard)  | 5    |
|   | D—316 stainless steel shaft (reverse spring for long stroke)  | 6    |
| DD—316 stainless steel shaft (reverse spring for long stroke) | 7   |      |
| <b>Mounting</b>   | Standard mounting   | 0    |
|   | Direct mounting block   | D    |
|   | VDI/VDE 3847 manifold <sup>3</sup>  | V    |
|   | Remote mount option <sup>4</sup>  | R    |

- HART 6 standard. Can be configured as HART 7 in the field.
- Can be upgraded to Pro Diagnostics in the field.
- Available with aluminum I.S. housing only.
- LCD required for Remote Mount.
- Only available with Ex d housing.
- Relay is not for use with natural gas.
- Relay may be used for three-way, single-acting actuators.
- Certification approved for Remote Mount option.



## Regional contacts

If you have questions about the Logix 3800 positioner or to find your local Logix sales representative, please contact one of the regional offices below.

### North America

#### Flowserve (USA) Control Valves

Phone: +1 801 489 8611  
Fax: +1 801 489 3719

#### Flowserve Canada Inc.

Phone: +1 780 449 4850  
Fax: +1 780 449 4850

### Latin America

#### Brazil - Flowserve Ltda.

Phone: +55 11 2169 6300  
Fax: +55 11 2169 6313

### Europe, Middle East, Africa

#### Flowserve (Austria) Control Valves gmbH

Phone: +43 (0)4242 41181 0  
Fax: +43 (0)4242 41181 50

#### Flowserve Netherlands

Phone: +31 10 524 1050  
Fax: +31 10 524 1055

#### Flowserve Russia/Belorussia

Phone: +7 495 781 5977 / 79  
Fax: +7 495 781 5979

#### Flowserve Abahsain (Saudi Arabia)

**Flow Control Company Ltd.**  
Phone: +966 3 857 3150 X 243  
Fax: +966 3 857 4243

#### Flowserve South Africa (Pty.) Ltd

Phone: +27 11 923 7330  
Fax: +27 11 974 6420

#### Flowserve Essen (Germany)

Phone: +49 (0)201 8919 5  
Fax: +49 (0)201 8919 662

### Asia Pacific

#### Flowserve (Singapore) Pte Ltd.

Phone: + 65 6879 8900  
Fax: +65 6862 4940

#### Flowserve (China)

Phone: +86 512 6255 2388

#### Flowserve India Controls

Phone: +91 80 401 46217  
Fax: +91 80 28 410286 287

#### Flowserve Australia Pty Ltd.

Phone: +61 397 593 300  
Fax: +61 397 593 301

### To learn more

For more details on the  
Logix 3800 positioner,  
visit [flowserve.com/logix3800](http://flowserve.com/logix3800)

Flowserve Corporation  
5215 North O'Connor Blvd.  
Suite 2300  
Irving, Texas 75039-5421 USA  
Telephone: +1 937 890 5839

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2020 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.

**AIBR000110-04 (EN/A4)** February 2020