

Flowserve and DuPont Joint Product Specification for Durco® Mark 3™ ASME Standard Pump

Competitive Advantage Contract (CAC) #1198-678W



Joint Product Specification overview


This Joint Product Specification (JPS) is the specification used for DuPont ASME (ANSI) pumps. It was created by the DuPont Corporate Pump Committee to provide pumps with the most cost-effective designs and features, while also providing the highest reliability. This JPS eliminates the need to develop or write other specifications for ASME (ANSI) pumps.

Durco Mark 3: The premier name in ASME chemical process pumps

The Durco Mark 3 chemical process pump provides outstanding hydraulic performance, unrivaled reliability and low total cost of ownership (TCO). Conforming to ASME (ANSI) B73.1, it incorporates many proven reliability- and performance-enhancing benefits:

- Renewable, high-efficiency performance over the life of the pump with the reverse vane impeller
- Optimal, predictable seal chamber pressures that are re-established after every impeller setting
- Maximal mechanical seal life due to an ideal seal environment created by the SealSentry™ seal chamber
- Robust shaft and bearing designs that minimize shaft deflection and extend mechanical seal and bearing life
- Fast and accurate impeller setting with the industry's most innovative external impeller adjustment mechanism

The Durco Mark 3 pump is available in multiple configurations, including low flow, recessed impeller and self-priming models.

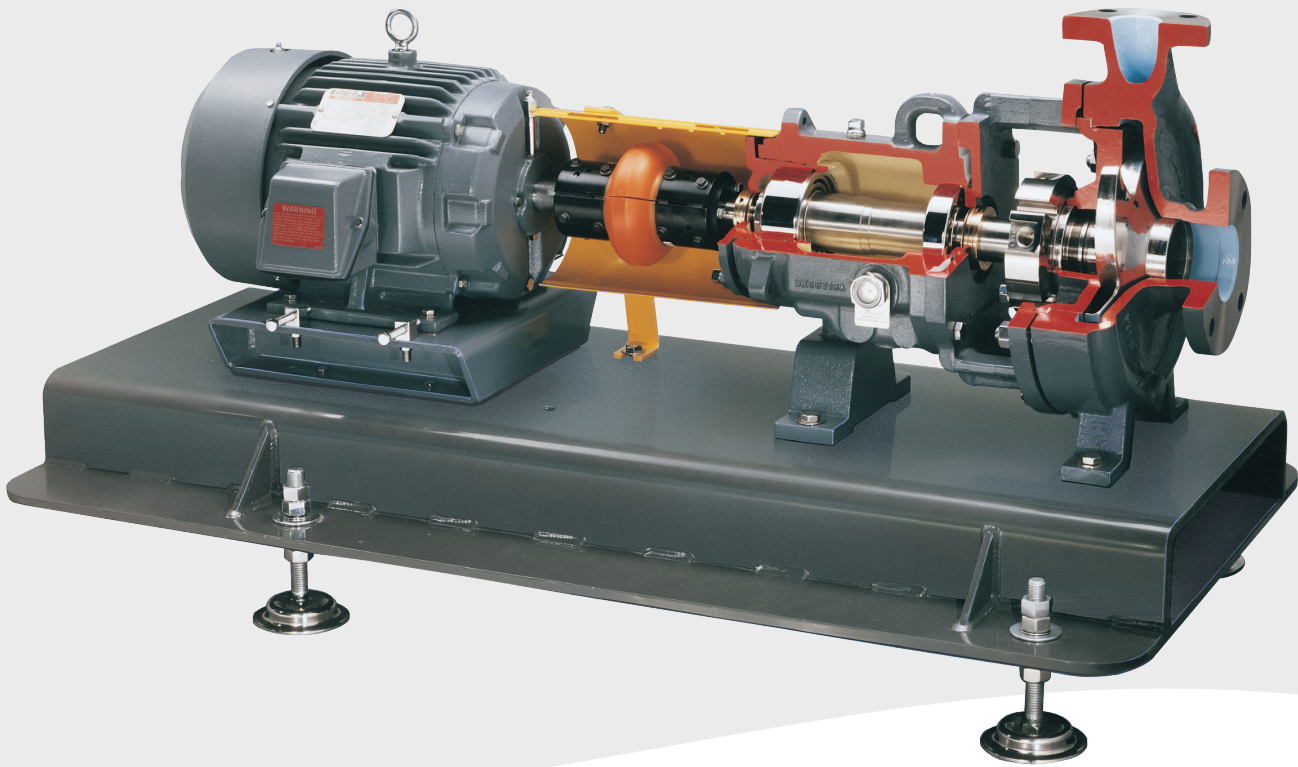

Specification details*

Power end

- ANSI 3A power end
- Solid shaft (no removable shaft sleeve), where possible
- Inpro/Seal® VBXX bearing isolators
- NTN or SKF bearings
- Viton® O-rings
- Oil bath lubrication
- Sight glass hole drilled and tapped on both sides of housing; glass installed on one side, other side plugged
- Tag installed indicating proper oil level

Wet end

- Standard FML rear cover with large taper bore seal chamber and flow modifiers; others as required by application
- Mechanical seals to comply with DuPont alliance agreements
- ASTM A193 Grade B8 Class 1 gland fasteners
- Casing flanges must have flat face finish complying with ASME B16.5. Surface must have serrated finish having 0.46 to 1.0 grooves per mm (groove spacing: 24 to 40 per in.), and 3.2 to 12.8 µm (125 to 500 µin.) roughness.

- Casing fasteners must be ASTM A193 Grade B7 with PTFE coating.
- Reverse vane impeller preferred for most applications
- Alloy parts not painted

Baseplate, coupling and motor


- DuPont G10P free-standing baseplate (Durco Type C)
- Rexnord® Omega® coupling with straight bore bushing on motor shaft, with two set screws set 90° apart on the hub. QD bushing on pump shaft with high-speed rings. All hubs bushing and high-speed rings will be wrought steel.
- Flowserve Durco coupling guard compliant with ASME B15.1
- NEMA frame motors specified to DuPont Engineering Standard SE65B for 50 or 60 Hz applications
- Motor alignment jackbolts
- Stainless steel shims
- Stainless steel pump and motor hold-down bolts

Some motor and pump combinations may require a different motor pedestal design to accommodate the relative centerline heights of the shafts.

* This overview lists some of the "highlights" of the JPS, as applied to the Mark 3 pump. To fully understand all available options and their advantages, it is essential that the complete JPS document be reviewed in detail.

Other chemical process pumps from Flowserve

Durco Mark 3 ISO chemical process pump




With many of the same advanced features of the Durco Mark 3 ASME pump, the Durco Mark 3 ISO pump provides significant operational- and maintenance-enhancing benefits to help users minimize the total cost of pump ownership. It is available in numerous sealed and sealless configurations — with a high degree of parts interchangeability — to meet the varied needs of global process industries.


The Durco Mark 3 ISO pump conforms to ISO 2858, ISO 5199 and ISO 15783 design criteria and is capable of handling temperatures up to 400°C (752°F).

Durco Mark 3 Group 4 high-capacity pump

The Durco Mark 3 Group 4 pump offers increased capacity with proven Durco performance and reliability along with ASME B73.1 design features. With flow rates to 3,861 m³/h (17,000 US gpm) — well beyond ASME size limits — the Durco Mark 3 Group 4 pump is ideal for high-flow, high-head applications in the chemical processing and general industries.



PolyChem™ PFA-lined S-Series pump




The Durco PolyChem S-Series PFA-lined, sealed pump offers outstanding performance and significant economy in highly corrosive applications. Incorporating the proven Mark 3 power end, it is engineered to maximize performance and reliability.

The PolyChem S-Series pump is able to withstand temperatures up to 150°C (300°F) and meets the following dimensional standards: ASME B73.1, ISO 2858/5199, and JIS drilling


Durco Guardian magnetic drive pump

Durco Guardian sealless pump technology offers superior, leak- and emission-free performance. It is compliant with ASME B73.1 dimensional standards, ASME B73.3 sealless pump standards and HI 5.1-5.6 standards.

The Guardian pump uses the same casing and reverse vane impeller as the Durco Mark 3 ASME standard pump and meets ASME Pressure Class 150 and 300 operating criteria to 290°C (550°F).



INNOMAG® TB-MAG™ ETFE-lined, magnetic drive pump



The INNOMAG TB-MAG pump is engineered to provide low TCO along with exceptional leakage and emissions protection in extremely corrosive and environmentally critical applications. In addition to being sealless, the TB-MAG pump does not have conventional bearings, thanks to its revolutionary dynamic thrust balancing system. This design results in highly efficient and reliable operation — even in applications containing solids.

The INNOMAG TB-MAG pump is compliant with ASME B73.3 or ISO 2858/15783 standards and capable of handling temperatures up to 121°C (250°F).



Alliance services

Global customer service and support

- Joint product specification
- Project support
- Application engineering
- Materials consulting
- Technical services
- Site services
- Procurement cycle reduction
- Training
- Parts inventory analysis
- Repair service
- Joint product development



RedRaven ready

Many Flowserve pumps, including Durco Mark 3 chemical pumps, are compatible with advanced internet of things (IoT) solutions such as RedRaven condition monitoring from Flowserve. Flowserve



RedRaven IoT solutions give you the insights and tools you need to monitor, analyze and predict equipment performance — so you can respond to problems quickly and minimize disruptions and downtime.



Ask your Flowserve representative about optional RedRaven IoT monitoring packages or visit flowserve.com/iot to learn more.

Flowserve Corporation
5215 North O'Connor Blvd.
Suite 700
Irving, Texas 75039-5421 USA
Telephone: +1-937-890-5839

PUFLY000854-01 (EN/AQ) January 2023
(Formerly FPD-1079)

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2023 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.